

Complete Rack PDU Solutions

From Basic to Intelligent

Up to 125A 3-Phase in 0U

Patented 4-in-1 IEC Combo Outlet

AHOKU

WWW.AHOKU.COM.TW


Omni-Power Orchestrator

Centralized Power Management System Total Solution

Designed to work seamlessly with the AHOKU Smart PDU series, the AHOKU Centralized Power Management System Total Solution provides a single centralized portal for managing multiple PDUs on one computer screen.
It delivers real-time monitoring of power metrics—including current, voltage, power factor (PF), energy consumption (kWh), and individual outlet status—scalable from a single standalone PDU to tens of thousands of PDUs. Featuring a quick, one-time IP setup, the system streamlines daily power management and optimizes operational efficiency for data center environments.



DCIM
(Managing Tens of Thousands of PDUs)

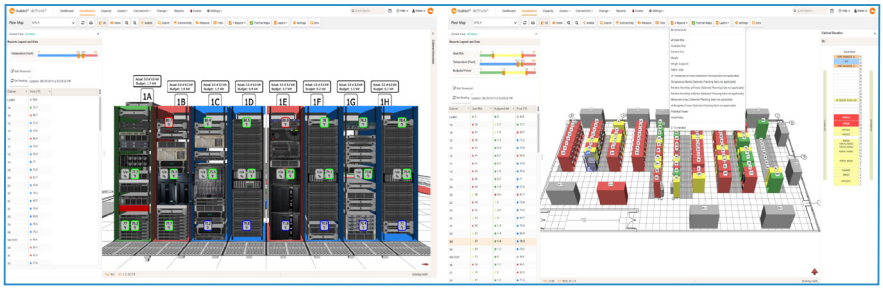

Centralized Power Management System
(Managing UP to 256 PDUs)




Omni-Power Orchestrator


Centralized Power Manager by Single IP Address.
Full-featured Smart PDUs Management with cost-optimized modular control.
ModBus TCP and ModBus-RTU supported.



Omni-Power Orchestrator
(Managing UP to 40 PDUs per piece)

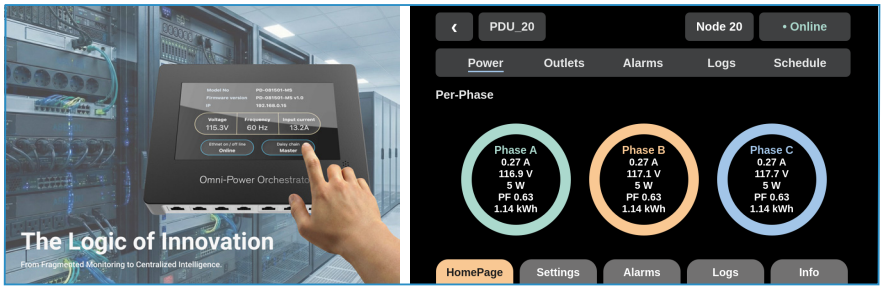

PDU Standalone
(Managing 1 PDU)

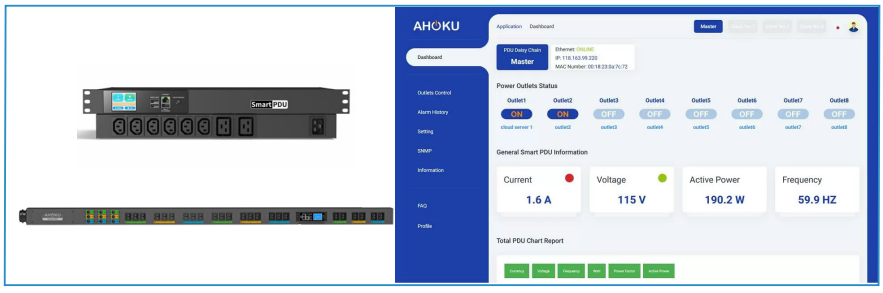

AHOKU PDU Selection Guide

PDU

Is Networking Required?

NO

YES

Smart PDU

Output Amps

Hi-PWR Density ≥ 30A

< 30A



0U

0U

1U

3-Phase

Single Phase

Single Phase

Single Phase

IEC Combo 4-in-1

125A
PD-IEC2412500-SM-3P
100A
PD-IEC2410000-SM-3P
63A
PD-IEC246300-SM-3P
PD-IEC366300-SM-3P
PD-IEC426300-SM-3P
32A
PD-IEC183200-SM-3P
PD-IEC243200-SM-3P
PD-IEC303200-SM-3P
PD-IEC363200-SM-3P
PD-IEC423200-SM-3P
PD-IEC183200-MI-3P
PD-IEC243200-MI-3P
PD-IEC303200-MI-3P
PD-IEC363200-MI-3P



IEC Combo 4-in-1

32A
PD-IEC163200-SM-1P
PD-IEC203200-SM-1P
PD-IEC243200-SM-1P
PD-IEC363200-SM-1P
PD-IEC163200-MI-1P
PD-IEC203200-MI-1P
PD-IEC243200-MI-1P
PD-IEC363200-MI-1P



IEC Combo 4-in-1

16A
PD-IEC161600-SM-1P
PD-IEC201600-SM-1P
PD-IEC241600-SM-1P
PD-IEC361600-SM-1P
PD-IEC161600-MI-1P
PD-IEC201600-MI-1P
PD-IEC241600-MI-1P
PD-IEC361600-MI-1P

NEMA / IEC

16A
PD-162001-SM
PD-161601-SM



IEC Combo 4-in-1

PD-IEC081500-SM
PD-IEC081600-SM
PD-IEC082000-SM

IEC Mixed C13+C19

PD-IEC081501-SM
PD-IEC081601-SM
PD-IEC082001-SM

NEMA

PD-081500-SM
PD-082000-SM

Others

PD-G081600-SM	
PD-F081600-SM	
PD-U061300-SM	

Basic PDU and Metered PDU

Basic PDU

IEC Socket

IEC



PD-IEC081001A0
PD-IEC082002A0
PD-C082003A0
PD-IEC121500 Series
PD-IEC121501 Series
PD-IEC122000 Series
PD-IEC122001A0

NEMA & Others

NEMA 5-15R



PD-081501 Series
PD-101501 Series
PD-121500 Series
PD-121501 Series
PD-141501 Series
PD-181501 Series
PD-241501 Series
PD-301501 Series

NEMA 5-20R



PD-082001 Series
PD-102001 Series
PD-122001 Series
PD-142001 Series
PD-182001 Series
PD-242001 Series
PD-302001 Series

Others



PD-G081607A1
PD-G081601
PD-F081600A1
PD-F081601
PD-I081000A1
PD-UN071000

Metered PDU

IEC

IEC



PD-IEC121500-M
PD-IEC121501-M
PD-IEC122000-M

NEMA

NEMA 5-15R



PD-0815 Metered
PD-1015 Metered
PD-1215 Metered
PD-1415 Metered
PD-1815 Metered
PD-2415 Metered
PD-3015 Metered

NEMA 5-20R



PD-0820 Metered
PD-1020 Metered
PD-1220 Metered
PD-1420 Metered
PD-1820 Metered
PD-2420 Metered
PD-3020 Metered

Verification and Testing

Proven Quality, Trusted Reliability

Product reliability stems from an unwavering commitment to quality. From the early stages of product development, AHOKU conducts continuous verification and testing at the TÜV laboratory.



Verification and Testing

Versatile 4-in 1 COMBO IEC C13151921 Socket

- High Versatility & Flexibility: A single socket accommodates four mainstream IEC standards—C13, C15, C19, and C21—significantly simplifying outlet selection.
- Product SKU Reduction & Simplified Management: Eliminates the need to buy multiple separate PDUs for different equipment, lowering inventory overhead and enabling cross-SKU standardization.
- Accelerated Deployment: Enables flexible device connection configurations, speeding up on-site installation and data center deploy ment times.
- High Load Capacity & Certified Safety: TUV-approved to safely handle heavy electrical loads, withstanding currents up to high voltages up to 415V to ensure reliability in high-demand environments.



Smart PDU

Hi-Density PWR ≥ 30A

Smart PDU


Hi-PWR Density ≥ 30A



3-Phase Smart Hi-Power Density 0U




Outlet-Level




3-Phase

4-in-1 IEC COMBO



Daisy Chain



Hot Swapping



Intelligent Power Management



125A, 415V, IEC Combo x 24

PD-IEC2412500-SM-3P



Socket: IEC-Combo 4-in 1 X 24
PWR Input: 380-415VAC, 125A
Terminal Block
3-Phase (WYE)

100A, 415V, IEC Combo x 24

PD-IEC2410000-SM-3P



Socket: IEC-Combo 4-in 1 X 24
PWR Input: 380-415VAC, 100A
Terminal Block
3-Phase (WYE)

63A, 415V, IEC Combo x 24

PD-IEC246300-SM-3P



Socket: IEC-Combo 4-in 1 X 24
Plug Type: IEC60309, 63A, 3P+N+E
PWR Input: 380-415VAC, 63A
3-Phase (WYE)

63A, 415V, IEC Combo x 42

PD-IEC426300-SM-3P



Socket: IEC-Combo 4-in 1 X 42
Plug Type: IEC60309, 63A, 3P+N+E
PWR Input: 380-415VAC, 63A
3-Phase(WYE)

63A, 415V, IEC Combo x 36

PD-IEC366300-SM-3P



Socket:IEC-Combo 4-in 1 X 36
Plug Type: IEC60309, 63A, 3P+N+E
PWR Input: 380-415VAC, 63A
3-Phase (WYE)

32A, 415V, IEC Combo x 42

PD-IEC423200-SM-3P



Socket:IEC-Combo 4-in 1 X 42
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

32A, 415V, IEC Combo x 36

PD-IEC363200-SM-3P



Socket: IEC-Combo 4-in 1 X 36
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

32A, 415V, IEC Combo x 30

PD-IEC303200-SM-3P



Socket: IEC-Combo 4-in 1 X 30
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

32A, 415V, IEC Combo x 24

PD-IEC243200-SM-3P



Socket: IEC-Combo 4-in 1 X 24
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

32A, 415V, IEC Combo x 18

PD-IEC183200-SM-3P



Socket: IEC-Combo 4-in 1 X 18
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

Smart PDU


Hi-Density PWR ≥ 30A

Smart PDU

Hi-PWR Density ≥ 30A




3-Phase Smart Hi-Power Density 0U




Total PWR Meter **3-Phase**

4-in-1 IEC COMBO



Daisy Chain



Hot Swapping



Intelligent Power Management



32A, 415V, IEC Combo x 36

PD-IEC363200-MI-3P



Socket: IEC-Combo 4-in 1 X 36
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

32A, 415V, IEC Combo x 30

PD-IEC303200-MI-3P



Socket: IEC-Combo 4-in 1 X 30
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

32A, 415V, IEC Combo x 24

PD-IEC243200-MI-3P



Socket: IEC-Combo 4-in 1 X 24
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

32A, 415V, IEC Combo x 18

PD-IEC183200-MI-3P



Socket: IEC-Combo 4-in 1 X 18
Plug Type: IEC60309, 32A, 3P+N+E
PWR Input: 380-415VAC, 32A
3-Phase (WYE)

Smart PDU

Hi-Density PWR ≥ 30A

Smart PDU

Hi-PWR Density ≥ 30A




Single Phase Smart PDU 0U


SMART (SM)

Outlet-Level

4-in-1 IEC COMBO



Daisy Chain



Hot Swapping



Intelligent Power Management



32A, 250V, IEC Combo x 36

PD-IEC363200-SM-1P



Socket: IEC-Combo 4-in 1 X 36
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

32A, 250V, IEC Combo x 24

PD-IEC243200-SM-1P



Socket: IEC-Combo 4-in 1 X 24
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

32A, 250V, IEC Combo x 20

PD-IEC203200-SM-1P



Socket: IEC-Combo 4-in 1 X 20
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

32A, 415V, IEC Combo x 16

PD-IEC163200-SM-1P



Socket: IEC-Combo 4-in 1 X 16
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

Smart PDU

Hi-Density PWR ≥ 30A


Smart PDU

Hi-PWR Density ≥ 30A



Single Phase Smart PDU 0U

Metered Input (MI)




Total PWR Meter

4-in-1 IEC COMBO



Daisy Chain



Hot Swapping



Intelligent Power Management



32A, 250V, IEC Combo x 36

PD-IEC363200-MI-1P



Socket: IEC-Combo 4-in 1 X 36
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

32A, 250V, IEC Combo x 24

PD-IEC243200-MI-1P



Socket: IEC-Combo 4-in 1 X 24
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

32A, 250V, IEC Combo x 20

PD-IEC203200-MI-1P



Socket: IEC-Combo 4-in 1 X 20
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

32A, 415V, IEC Combo x 16

PD-IEC163200-MI-1P



Socket: IEC-Combo 4-in 1 X 16
Plug Type: IEC60309, 32A, 2P+E
PWR Input: 250VAC, 32A
Single Phase

Smart PDU

Max. Current < 30A

Smart PDU


< 30A

Single Phase Smart PDU 0U




Outlet-Level

4-in-1 IEC COMBO



Daisy Chain



Hot Swapping



Intelligent Power Management



16A, 250V, IEC Combo x 36

PD-IEC361600-SM-1P



Socket: IEC-Combo 4-in 1 X 36
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

16A, 250V, IEC Combo x 24

PD-IEC241600-SM-1P



Socket: IEC-Combo 4-in 1 X 24
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

16A, 250V, IEC Combo x 20

PD-IEC201600-SM-1P



Socket: IEC-Combo 4-in 1 X 20
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

16A, 250V, IEC Combo x 16

PD-IEC161600-SM-1P




Socket: IEC-Combo 4-in 1 X 16
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

Smart PDU

< 30A

Single Phase Smart PDU 0U



Total PWR Meter

16A, 250V, IEC Combo x 36

PD-IEC361600-MI-1P



Socket: IEC-Combo 4-in 1 X 36
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

16A, 250V, IEC Combo x 24

PD-IEC241600-MI-1P



Socket: IEC-Combo 4-in 1 X 24
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

16A, 250V, IEC Combo x 20

PD-IEC201600-MI-1P



Socket: IEC-Combo 4-in 1 X 20
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

16A, 250V, IEC Combo x 16

PD-IEC161600-MI-1P



Socket: IEC-Combo 4-in 1 X 16
Plug Type: IEC60309, 16A, 2P+E
PWR Input: 250VAC, 16A
Single Phase

Smart PDU

Max. Current < 30A

Smart PDU


< 30A

Single Phase Smart PDU 0U


SMART (SM)

Outlet-Level

4-in-1 IEC COMBO



Daisy Chain



LCD Touch Screen



Intelligent Power Management



IEC Combo 4-in 1x 8

PD-IEC082000-SM
PD-IEC081600-SM
PD-IEC081500-SM



PD-IEC082000-SM
Socket: IEC-Combo 4-in 1 X 8
Plug Type: IEC C20
PWR Input: 100-125VAC, 20A

PD-IEC081600-SM
Socket: IEC-Combo 4-in 1 X 8
Plug Type: IEC C20
PWR Input: 200-250VAC, 16A

PD-IEC081500-SM
Socket: IEC-Combo 4-in 1 X 8
Plug Type: IEC C20
PWR Input: 200-250VAC, 15A

2- inch Color Touch Screen
Daisy Chain

IEC Mixed C13+C19 x 8

PD-IEC082001-SM
PD-IEC081601-SM
PD-IEC081501-SM



PD-IEC082001-SM
Socket: IEC C13 X 6
IEC C19 X 2
Plug Type: IEC C20
PWR Input: 100-125VAC, 20A

PD-IEC081601-SM
Socket: IEC C13 X 6
IEC C19 X 2
Plug Type: IEC C20
PWR Input: 200-250VAC, 16A

PD-IEC081501-SM
Socket: IEC C13 X 6
IEC C19 X 2
Plug Type: IEC C20
PWR Input: 100-250VAC, 15A

2- inch Color Touch Screen
Daisy Chain

NEMA 5-15/20R x 8, 125VAC

PD-082000-SM
PD-081500-SM



PD-082000-SM
Socket: NEMA 5-20R X 8
Plug Type: IEC C20
PWR Input: 100-125VAC, 20A

PD-081500-SM
Socket: NEMA 5-15R X 8
Plug Type: IEC C20
PWR Input: 100-125VAC, 15A

2-inch Color Touch Screen
Daisy Chain

Schuko Socket x 8, 16A 250VAC

PD-G081600-SM



Socket: Schuko Socket X 8
Plug Type: IEC C20
PWR Input: 200-250VAC, 16A

2- inch Color Touch Screen
Daisy Chain

French Socket x 8, 16A 250VAC

PD-F081600-SM



Socket: French Socket X 8
Plug Type: IEC C20
PWR Input: 200-250VAC, 16A

2- inch Color Touch Screen
Daisy Chain

UK (British) Socket x 6, 13A 250VAC

PD-U061300-SM




Socket: UK Socket X 6
Plug Type: IEC C20
PWR Input: 200-250VAC, 13A

2- inch Color Touch Screen
Daisy Chain

Smart PDU

Max. Current < 30A

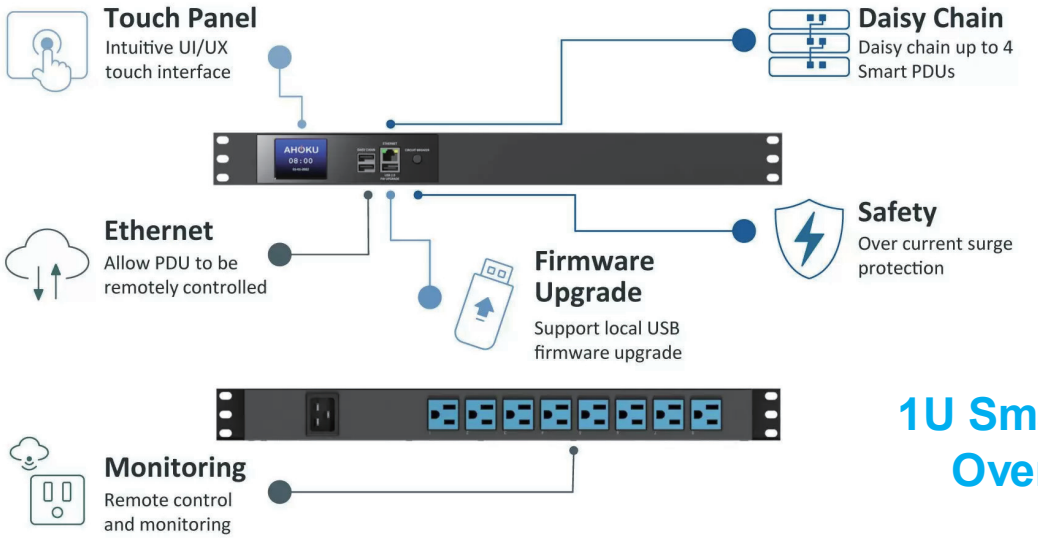

1U Smart PDU Overview

										
Model No.	PD-IEC082000-SM	PD-IEC081600-SM	PD-IEC081500-SM	PD-IEC082001-SM	PD-IEC081601-SM	PD-IEC081501-SM	PD-081500-SM	PD-082000-SM	PD-G081600-SM	PD-F081600-SM	PD-U061300-SM
Power Rating	20A, 125VAC (UL 16A, 100-250VAC)	16A, 200-250VAC	15A, 200 - 250VAC (UL 12A, 100-250VAC)	20A, 125VAC (UL 16A, 100-250VAC)	16A, 200-250VAC	15A, 100 - 250VAC (UL 12A, 100-250VAC)	15A, 100 - 125VAC	20A, 100 - 125VAC	16A, 200-250VAC	16A, 200-250VAC	13A, 200-250VAC
Output Receptacle Type	C13 C15 C19 4-in-1 C21			IEC 320 C13 X 6 IEC 320 C19 X 2			NEMA 5-15R X 8	NEMA 5-20R X 8	Schuko Socket X 8	French Socket X 8	UK Socket X 6
Input Plug Type	IEC320 C20										
Touch Screen Display	2 inch Color LCD Display										
Metered per Outlet	Individual Outlet Power Monitoring : Current (A), Voltage(V), Power(KW), Energy(KWH), PF										
Outlet Control	Switch ON/OFF Individually										
Overload Protection	Built-in MCB (Miniature Circuit Breaker)										
Outlet Scheduling	Scheduling per Outlet; Timer for Switching ON/OFF per Outlet										
Daisy Chain Ports	Supported, Daisy Chain Up to 4 Units, 2 USB Ports: 1 in and 1 out										
Dimensions (L x W x H)	W 481 × D 201 × H 44.5 mm										

Smart PDU

0U Smart PDU


0U Rack-mount Smart PDU



AHOKU	AMP.	Model #	SM (Smart): Outlet-Level SMART (SM) Single Phase	SM (Smart): Outlet-Level SMART (SM) 3-Phase	MI (Metered Input): Total PWR Meter Metered Input (MI) Single Phase	MI (Metered Input): Total PWR Meter Metered Input (MI) 3-Phase	Plug Type IEC 60309-2	PWR Rating	# of MCB
Hi-Density PWR ≥ 30A	125A	PD-IEC2412500-SM-3P		●			3P+N+E Diameter:62mm	Input: 380-415VAC,125A Output:200-250VAC	32A MCB * 12
	100A	PD-IEC2410000-SM-3P		●				Input: 380-415VAC,100A Output:200-250VAC,100A	
	63A	PD-IEC366300-SM-3P		●				Input: 380-415VAC,63A Output: 200-250VAC,63A	21A MCB * 9
		PD-IEC426300-SM-3P		●					
		PD-IEC246300-SM-3P		●					
	32A	PD-IEC183200-SM-3P		●			3P+N+E Diameter:62mm	Input: 380-415VAC,32A Output: 200-250VAC,32A	16A MCB * 6
		PD-IEC243200-SM-3P		●					
		PD-IEC303200-SM-3P		●					
		PD-IEC363200-SM-3P		●					
		PD-IEC423200-SM-3P		●					
		PD-IEC183200-MI-3P				●			16A MCB * 6
		PD-IEC243200-MI-3P				●			
		PD-IEC303200-MI-3P				●			
		PD-IEC363200-MI-3P				●			
	32A	PD-IEC163200-SM-1P	●				1P+N+E Diameter:43mm	Input: 200-250VAC,32A Output: 200-250VAC,32A	16A MCB * 2
		PD-IEC203200-SM-1P	●						
		PD-IEC243200-SM-1P	●						
		PD-IEC363200-SM-1P	●						
		PD-IEC163200-MI-1P			●				
		PD-IEC203200-MI-1P			●				
		PD-IEC243200-MI-1P			●				
		PD-IEC363200-MI-1P			●				
< 30A	16A	PD-IEC161600-SM-1P	●				1P+N+E Diameter:43mm	Input: 200-250VAC,16A Output: 200-250VAC,16A	16A MCB * 1
		PD-IEC201600-SM-1P	●						
		PD-IEC241600-SM-1P	●						
		PD-IEC361600-SM-1P	●						
		PD-IEC161600-MI-1P			●				
		PD-IEC201600-MI-1P			●				
		PD-IEC241600-MI-1P			●				
		PD-IEC361600-MI-1P			●				

Basic & Local Metered PDU

Custom Build for The Right Fit

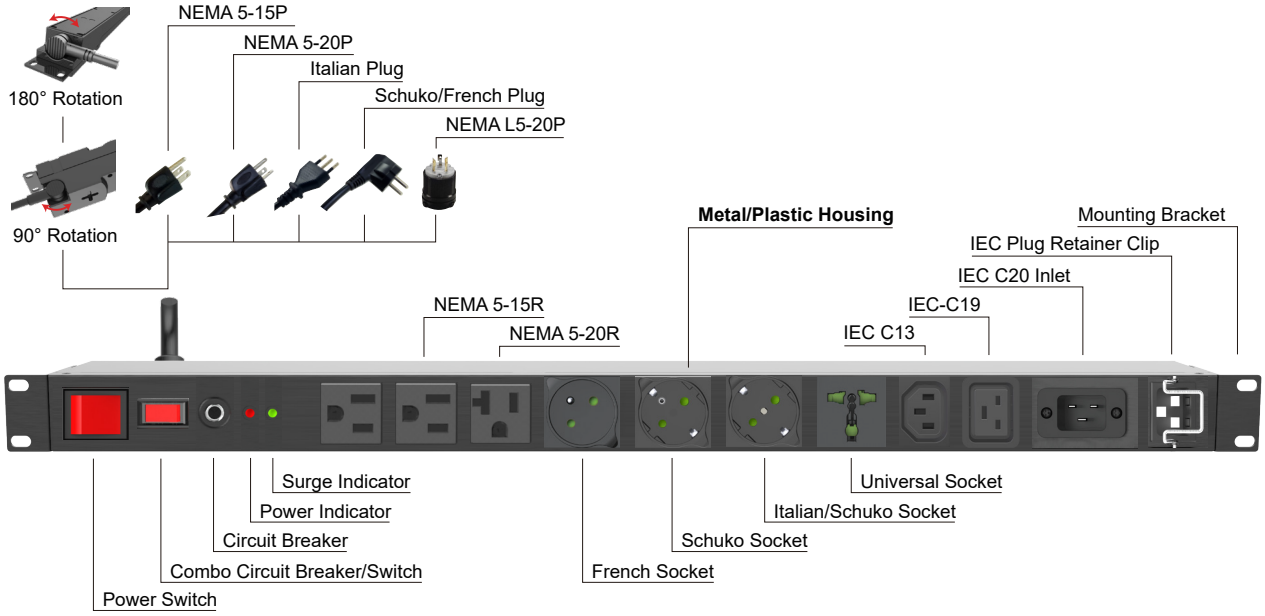

Basic & Local Metered PDU

Basic PDU

Basic PDU


IEC Socket

C13



IEC C13 Socket X 12

PD-IEC121501

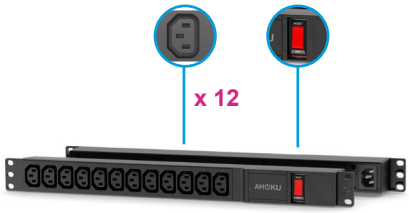


Front Side Socket: IEC C13 X 12
Rear side Inlet IEC C14

Plug Type: IEC C14
Power Input: 125VAC, 15A ; 250VAC, 10A
Detachable Power Cord

IEC Socket C13 X 10 + C19 Socket X 2

PD-IEC122000

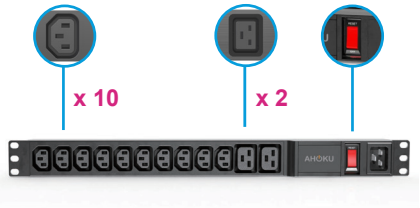


Front Side Socket: IEC C13 X 10
IEC C19 X 2

Rear side Inlet IEC C20
Plug Type: IEC C20
Power Input: 125VAC, 15A ; 250VAC, 10A
Detachable Power Cord

IEC C13 Socket X 8


PD-IEC082002A0

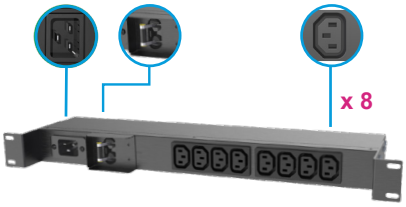

Front Side Socket: IEC C13 X 8
Rear side Inlet IEC C20
Plug Type: IEC C20
Power Input: 125VAC, 15A ; 250VAC, 10A
Detachable Power Cord

IEC C13 Socket X 8

PD-IEC081001A0

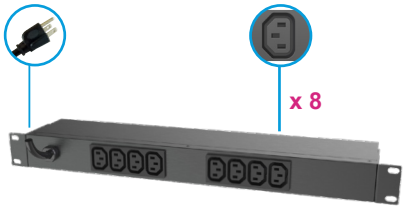


Front Side Socket: IEC C13 X 8
Plug Type: NEMA 5-15P

Power Input: 125VAC, 15A ; 250VAC, 10A

IEC C13 Socket X 8

PD-C082003A0

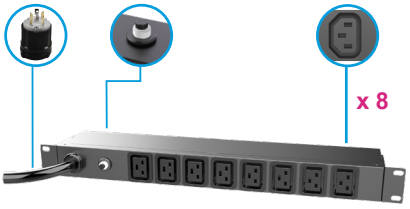

Front Side Socket: IEC C19 X 8
Plug Type: NEMA L6-30P

Power Input: 250VAC, 30A

Basic & Local Metered PDU

Basic PDU

Basic PDU
IEC Socket


NEMA 5-15R



15A, 125VAC

NEMA 5-15R X 8


PD-081501 Series

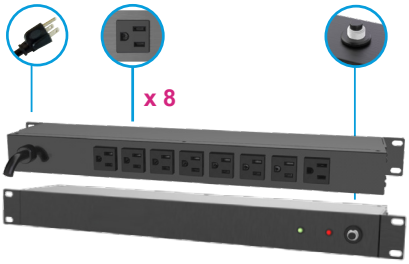

Rear side Socket: NEMA 5-15R X 8
PWR Inlet: NEMA 5-15P
125VAC, 15A

NEMA 5-15R


PD-101501 Series

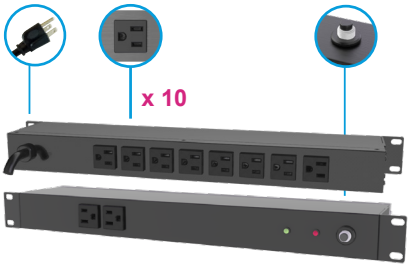

Front: NEMA 5-15R X 2
Rear: NEMA 5-15R X 8
PWR Inlet: NEMA 5-15P
125VAC, 15A

NEMA 5-15R Socket X 12


PD-121500

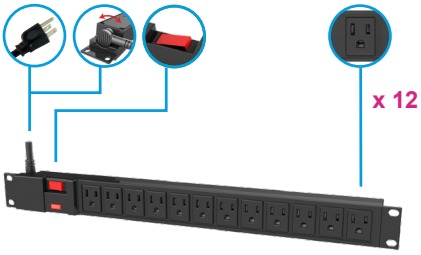

Front Side Socket: NEMA 5-15R X 12
PWR Inlet: NEMA 5-15P
with 180 Degree rotatable Cord
125VAC, 15A

NEMA 5-15R Socket X 12


PD-121501 Series

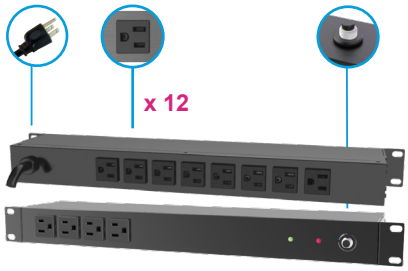

Front Side Socket: NEMA 5-15R X 4
Rear Side Socket: NEMA 5-15R X 8
PWR Inlet: NEMA 5-15P
125VAC, 15A

NEMA 5-15R Socket X 14


PD-141501 Series

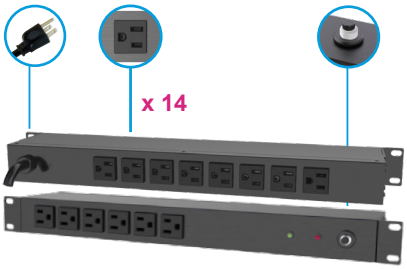

Front Side Socket: NEMA 5-15R X 6
Rear Side Socket: NEMA 5-15R X 8
PWR Inlet: NEMA 5-15P
125VAC, 15A

NEMA 5-15R Socket X 18


PD-181500 **0U**

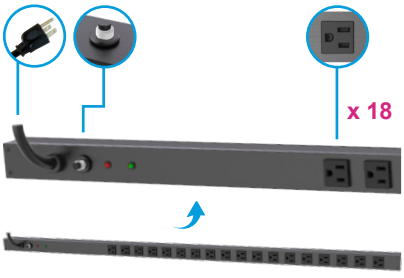

Front Side Socket: NEMA 5-15R X 16
Rear Side Socket: NEMA 5-15R X 2
PWR Inlet: NEMA 5-15P
125VAC, 15A

NEMA 5-15R Socket X 24


PD-122400 **0U**

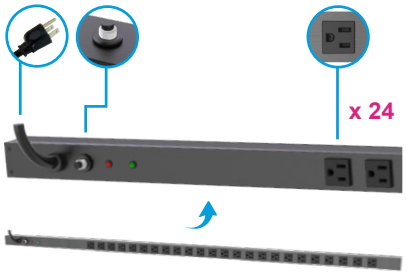

Front Side Socket: NEMA 5-15R X 22
Rear Side Socket: NEMA 5-15R X 2
PWR Inlet: NEMA 5-15P
125VAC, 15A

NEMA 5-15R Socket X 30

PD-123000 **0U**

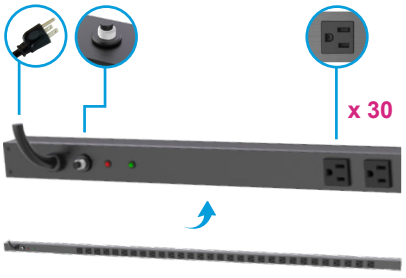

Front Side Socket: NEMA 5-15R X 28
Rear Side Socket: NEMA 5-15R X 2
PWR Inlet: NEMA 5-15P
125VAC, 15A

Basic & Local Metered PDU

Basic PDU

Basic PDU

NEMA 5-20


NEMA 5-20R



20A, 125VAC

NEMA 5-20R X 8


PD-082001 Series

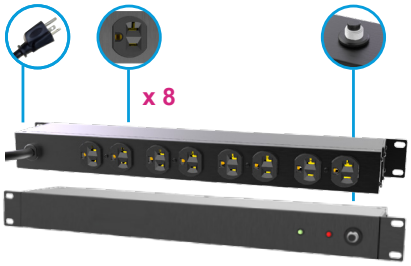

Rear Side Socket: NEMA 5-20R X 8
PWR Inlet: NEMA 5-20P, 125VAC, 20A

NEMA 5-20R X 10

PD-102001 Series

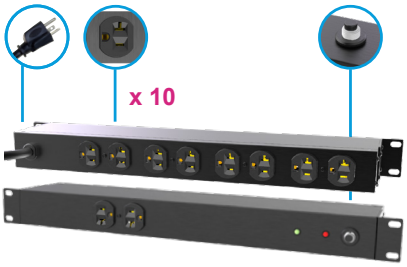

Front Side Socket: NEMA 5-20R X 2
Rear Side Socket: NEMA 5-20R X 8
PWR Inlet: NEMA 5-20P, 125VAC, 20A

NEMA 5-20R X 12

PD-122001 Series



Front Side Socket: NEMA 5-20R X 4
Rear Side Socket: NEMA 5-20R X 8
PWR Inlet: NEMA 5-20P, 125VAC, 20A

NEMA 5-20R X 14


PD-142001 Series



Front Side Socket: NEMA 5-20R X 8
Rear Side Socket: NEMA 5-20R X 6
PWR Inlet: NEMA 5-20P, 125VAC, 20A

NEMA 5-20R X 18


PD-182001 Series 0U

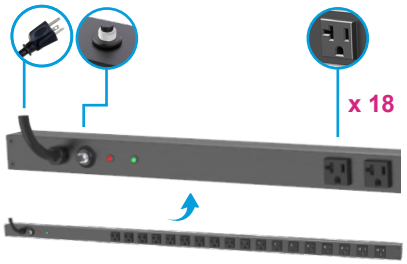

Front Side Socket: NEMA 5-20R X 16
Rear Side Socket: NEMA 5-20R X 2
PWR Inlet: NEMA 5-20P, 125VAC, 20A

NEMA 5-20R X 24


PD-242001 Series 0U

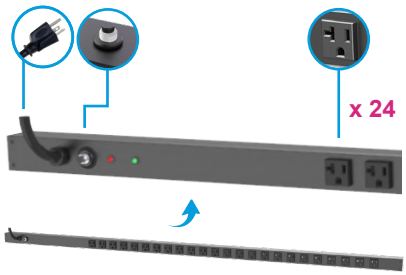

Front Side Socket: NEMA 5-20R X 22
Rear Side Socket: NEMA 5-20R X 2
PWR Inlet: NEMA 5-20P
125VAC, 20A

NEMA 5-20R X 30

PD-302001 Series 0U

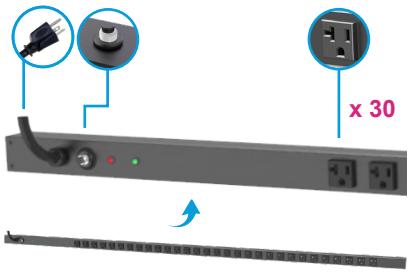

Front Side Socket: NEMA 5-20R X 28
Rear Side Socket: NEMA 5-20R X 2
PWR Inlet: NEMA 5-20P
125VAC, 20A

Basic & Local Metered PDU

Basic PDU

Basic PDU

NEMA 5-20


TYPE F



16A, 230VAC

German(Schuko)

PD-G081607A1

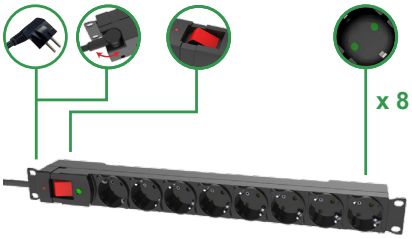

Front Side Socket: Schuko Socket X 8
PWR Inlet: 200-250VAC, 16A
Plug Type: Schuko Plug (Type F)
90 Degree rotatable cord

German(Schuko)

PD-G081601



Front Side Socket: Schuko Socket X 8
PWR Inlet: IEC C20 200-250VAC, 16A
Plug Type: Schuko Plug (Type F)
Detachable Power Cord


TYPE E



16A, 230VAC

French


PD-F081600A1

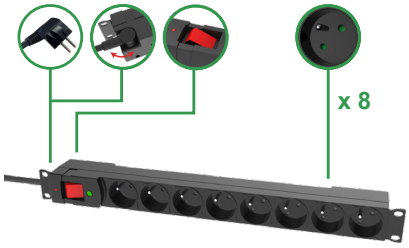

Front Side Socket : French Socket X 8
PWR Inlet: 200-250VAC, 16A
Plug Type: French Plug (Type E)
90 Degree rotatable cord

French

PD-F081601

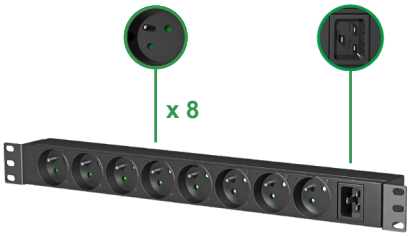

Front Side Socket : Power Socket X 8
PWR Inlet: 200-250VAC, 16A
Plug:Type: French type (TypeE)
Detachable Power Cord


TYPE L



10A, 230VAC

Italian


PD-I081000A1

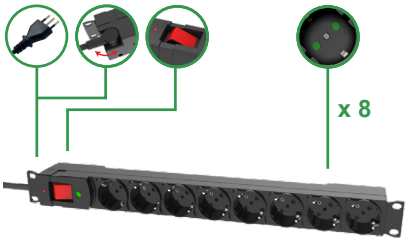

Front Side Socket : Power Socket X 8
PWR Inlet: 200-250VAC, 10A
90 Degree Rotatable Cord
Plug type: Italian type (Type L)

Universal

PD-UN071000

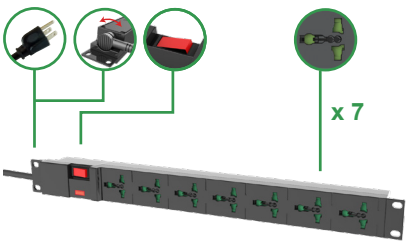

Front Side Socket : Power Socket X 7
PWR Inlet: 125/250VAC, 10A
180 Degree Rotatable Cord

Basic & Local Metered PDU

Metered PDU

Metered PDU

IEC Socket

IEC 60320 C13



125VAC, 15A
250VAC, 10A

IEC C13 X 12

PD-IEC121500-M



Front Side Socket: IEC C13 X 12
Front Side Inlet: IEC C14
Plug Type: IEC C14
Power Input: 125VAC, 15A ; 250VAC, 10A
Meter Display
Detachable Power Cord

IEC C13 X 12


PD-IEC121501-M



Front Side Socket: IEC C13 X 12
Rear side Inlet: IEC C14
Plug Type: IEC C20
Power Input: 125VAC, 15A ; 250VAC, 10A
Meter Display
Detachable Power Cord

IEC C13 X 10 + C19

PD-IEC122000-M

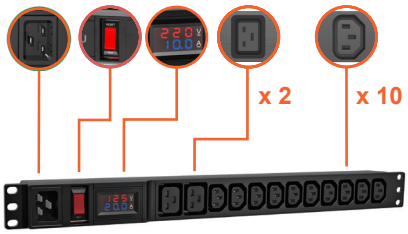

Front Side Socket: IEC C13 X 10
IEC C19 X 2
Front side Inlet: IEC C19
Power Input: 125VAC, 20A ; 250VAC, 16A
Meter Display
Detachable Power Cord

Basic & Local Metered PDU

Metered PDU

Metered PDU

NEMA 5-15


NEMA 5-15R



15A, 125VAC

NEMA 5-15R X 8

PD-0815 Metered

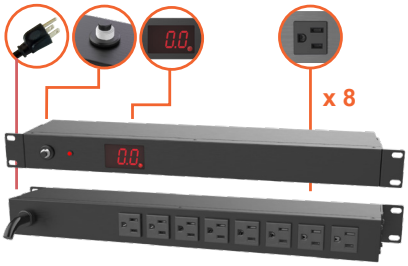

Rear Side Socket: NEMA 5-15R X 8
Rear Side PWR Inlet: NEMA 5-15P
Power Input: 125VAC, 15A
Meter Display

NEMA 5-15R X 10


PD-1015 Metered



Front Side Socket: NEMA 5-15R X 2
Rear Side Socket: NEMA 5-15R X 8
Rear Side PWR Inlet: NEMA 5-15P
Power Input: 125VAC, 15A
Meter Display

NEMA 5-15R X 12


PD-1215 Metered

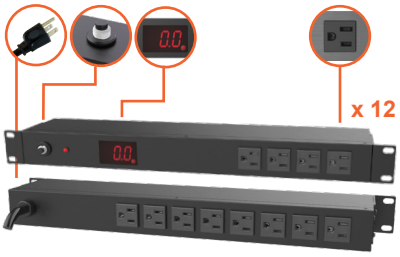

Front Side Socket: NEMA 5-15R X 4
Rear Side Socket: NEMA 5-15R X 8
Rear Side PWR Inlet: NEMA 5-15P
Power Input: 125VAC, 15A
Meter Display

NEMA 5-15R X 14

PD-1415 Metered

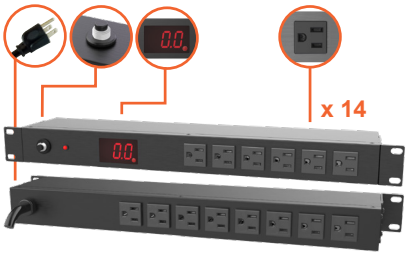

Front Side Socket: NEMA 5-15R X 6
Rear Side Socket: NEMA 5-15R X 8
Rear Side PWR Inlet: NEMA 5-15P
Power Input: 125VAC, 15A
Meter Display

NEMA 5-15R X 18

PD-1815 Metered

0U



Front Side Socket: NEMA 5-15R X 18
PWR Inlet: NEMA 5-15P
Power Input: 125VAC, 15A
Meter Display

NEMA 5-15R X 24

PD-2415 Metered

0U



Front Side Socket: NEMA 5-15R X 24
PWR Inlet: NEMA 5-15P
Power Input: 125VAC, 15A
Meter Display

NEMA 5-15R X 30

PD-3015 Metered

0U



Front Side Socket: NEMA 5-15R X 30
PWR Inlet: NEMA 5-15P
Power Input: 125VAC, 15A
Meter Display

Basic & Local Metered PDU

Metered PDU

Metered PDU

NEMA 5-20

NEMA 5-20R



20A, 125VAC

NEMA 5-20R X 8

PD-0820 Metered



Rear Side Socket: NEMA 5-20R X 8
Rear Side PWR Inlet: NEMA 5-20P
Power Input: 125VAC, 20A
Meter Display

NEMA 5-15R x 10

PD-1020 Metered



Front Side Socket NEMA 5-20R X 2
Rear Side Socket: NEMA 5-20R X 8
Rear Side PWR Inlet: NEMA 5-20P
Power Input: 125VAC, 20A
Meter Display

NEMA 5-20R x 12


PD-1220 Metered



Front Side Socket: NEMA 5-20R X 4
Rear Side Socket: NEMA 5-20R X 8
Rear Side PWR Inlet: NEMA 5-20P
Power Input: 125VAC, 20A
Meter Display

NEMA 5-20R x 14

PD-1420 Metered

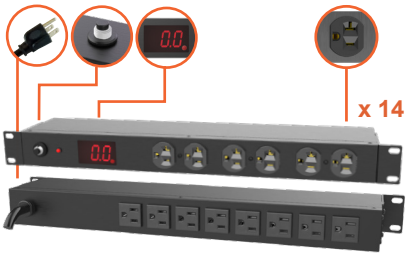

Front Side Socket: NEMA 5-20R X 6
Rear Side Socket: NEMA 5-20R X 8
Rear Side PWR Inlet: NEMA 5-20P
Power Input: 125VAC, 20A
Meter Display

NEMA 5-20R X 18

PD-1820 Metered

0U



Front Side Socket: NEMA 5-20R X 18
PWR Inlet: NEMA 5-20P
Power Input: 125VAC, 20A
Meter Display

NEMA 5-20R X 24

PD-2420 Metered

0U



Front Side Socket: NEMA 5-20R X 24
PWR Inlet: NEMA 5-20P
Power Input: 125VAC, 20A
Meter Display

NEMA 5-20R X 30

PD-3020 Metered

0U



Front Side Socket: NEMA 5-20R X 30
PWR Inlet: NEMA 5-20P
Power Input: 125VAC, 20A
Meter Display



AHOKU

WWW.AHOKU.COM.TW

AHOKU Electronic Company
5F., No.88, Sec. 1, Neihu Rd., Neihu Dist.,
Taipei City 114, Taiwan
Tel: +886.2.27991199 Fax: +886.2.27999099
E-mail：sales.team@ahoku.com
www.ahoku.com.tw

Utility / Design / Invention Patent Protected
Manufactured by UL & TUV verified factory

ODM/OEM